


Bär FreeAccess VanLift – Features & benefits

Because we are prepared for Canadian requirements!

24 months
warranty on parts
and labour

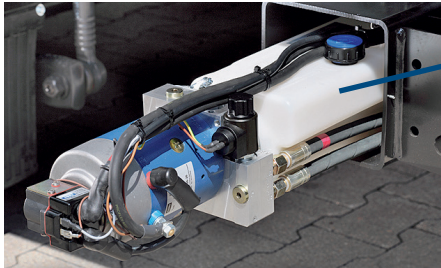

Safe protection for power pack and control unit in the beam.




For temperatures up to -45° celcius and for the climate: Biodegradable Syntofluid oil.




Intuitive in use and durably constructed: **Bär Control EVO** (water resitant IP67).




Well protected against the weather by covered cylinders and **cathodic dip** and **powder coated steel parts**.

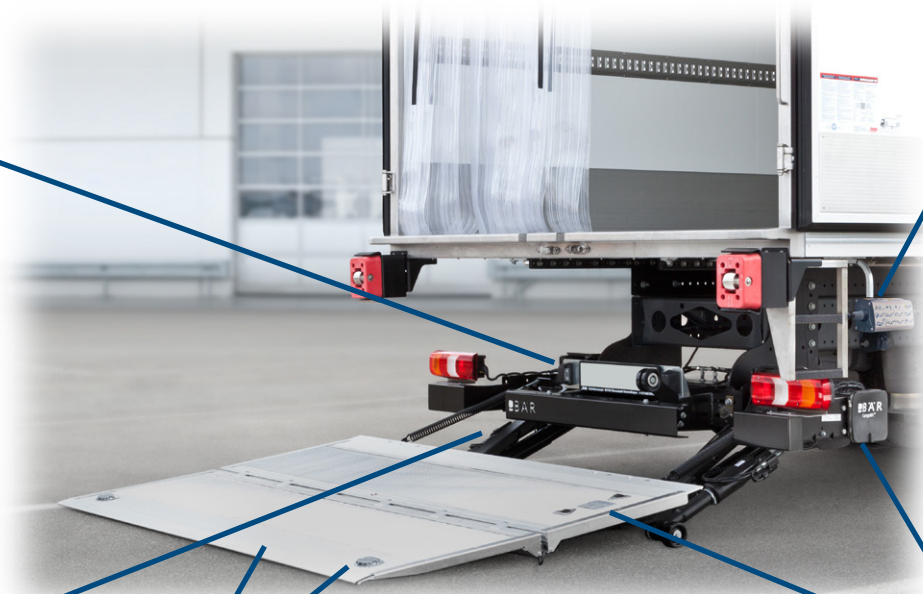


For a better protection the robust cover for beam can be **padlocked**.

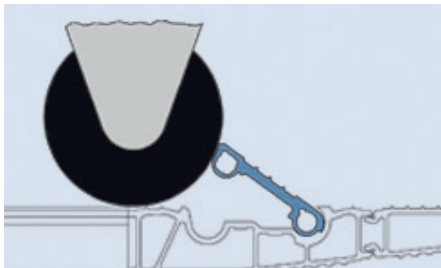

Trolley card stop for save transport of two trolleys.

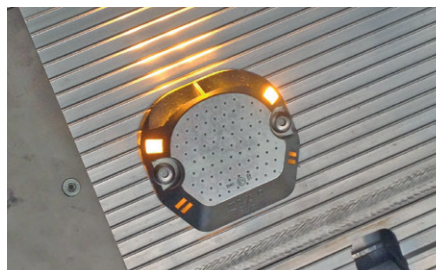

Alerting the surrounding in a reliable way: LED flashing light **CargoFlash**.

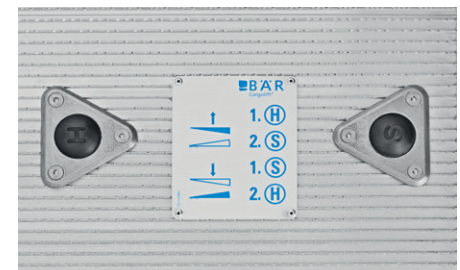

Simple operation on the platform by the two **button foot control**.

Bär Cargolift Falt – Tuck-Away – BC 1500 F2 / F4 & BC 2000 F4

Simple handling with solid loading capacity



Manual unfolding with compact platform dimensions, the BC F2 / F4 offers a load capacity of 3307 lbs (1500 kg) / 4409 lbs (2000 kg) and aluminum platforms with height of 59,45" (1510 mm). All Falt Cargolifts (Tuck-Away) remain out of sight under the vehicle while at a ramp and quickly can be ready for use on demand.

Carrier vehicle	GVW/t min.	GVW/t max.
Truck	17637 lbs (8,0 t)	88185 lbs (40,0 t)
Trailer	17637 lbs (8,0 t)	88185 lbs (40,0 t)

Load capacity	Load centre	Load moment
3307 lbs (1500 kg)	27,56" (700 mm)	92932 lb-in (10,5 kNm)
4409 lbs (2000 kg)	27,56" (700 mm)	123910 lb-in (14 kNm)

Aluminium platform

Platform system	Height	Width
BAfalt40VL	59,45" (1510 mm)	88,58" (2250 mm)

Minimum body width of 98,43" (2500 mm)

Weight with platform width 2250 mm (88,58")

Load capacity	Weight F2	Weight F4
3307 lbs (1510 kg)	1082 lbs (491 kg)	1133 lbs (514 kg)
4409 lbs (2000 kg)	1133 lbs (514 kg)	1184 lbs (537 kg)

The weight includes the standard scope of supply with mounting material, cables and under run bar.

Equipment




Natural aluminium rear platform side.



User-friendly manual folding of platform package and platform tip with spring relief.



Bär Control EVO is intuitive in use, durably constructed and can be easily operated with gloves thanks to the vertically and horizontally operating joysticks.

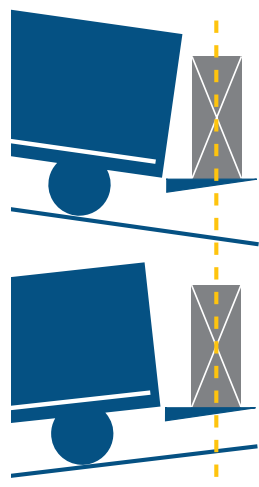

F4 advantage:
Platform tilting at any lifting height (e.g. on a hillside) by two tilting cylinders